



International Scientific Organization
<http://iscientific.org/>
 Chemistry International
www.bosaljournals.com/chemint/



Comparative experimental study on the COD removal in aqueous solution of pesticides by the electrocoagulation process using monopolar iron electrodes

K. Benahmed Daij, S. Bellebia* and Z. Bengharez

Laboratoire Matériaux avancés et physico-chimie pour l'environnement et la santé, Faculté des Sciences Exactes, Université Djillali Liabès, Sidi-Bel -Abbés, BP 89, Algérie

*Corresponding author's E. mail: bellebia_sohbi@yahoo.fr

ARTICLE INFO

Article type:

Research article

Article history:

Received January 2017

Accepted August 2017

October 2017 Issue

Keywords:

Current density

Anode

COD

Pesticides

Organophosphorus

ABSTRACT

A comparative study for the COD removal of Chlorpyrifos, Fenitrothion (3%) and Acetamiprid (20%) by electrocoagulation process was performed. The effect of various parameters of electrocoagulation (EC) on removal efficiency was studied and optimized. The COD removal using nonpolar iron electrodes was affected by current density, contact time, initial pH and initial concentration of pesticides. The optimum conditions for the electrocoagulation process were identified as contact time (4, 5 and 10 min), for a maximum abatement of 100 mg/L pesticide solution, respectively. The results provide an important idea for the development electrocoagulation process to remove pesticides significantly along with COD removal using moderate iron concentration, thereby lowering the cost of treatment. Moreover, results show that the pesticide was removal quickly with a maximum rate of 87% for the contact time of 4 min, which revealed that pesticides wastewater can be treated using electrocoagulation.

© 2017 International Scientific Organization: All rights reserved.

Capsule Summary: The EC process is effective for the removal of COD. Aqueous solution of organophosphorus pesticides was treated by electrocoagulation at low current density, which proved to be efficient for the treatment of pesticides at optimum conditions.

Cite This Article As: K. Benahmed Daij, S. Bellebia and Z. Bengharez. Comparative experimental study on the COD removal in aqueous solution of pesticides by the electrocoagulation process using monopolar iron electrodes. Chemistry International 3(4) (2017) 420-427.



INTRODUCTION

Pesticides are being ever more used to control the loss of agricultural crops and improve yield. In developing countries like Algeria, the use of pesticides is dispossessed to be so imperative that they are associated with growth of human benefit (Younes and Galal-Gorchev, 2000). Extensive usage of pesticides is accountable for water contamination because of their leaching and runoff losses. Inappropriate discarding of the empty pesticide bottles, washing of spray instruments


and unfettered discharge from manufacturing units are further sources of water resources contamination. The removal mechanisms reported in the electrolysis process generally include oxidation, reduction, decomposition, so that the mechanisms of EC processes include coagulation, adsorption, precipitation and flotation (Rajeshwar et al., 1994; Vlyssides et al., 1999). EC is a low-cost process and effective method for treating water and wastewater. It was tested successfully to treat drinking water (Mameri et al., 1998; Vik et al., 1984), aqua cultural wastewater (Lin et Wu, 1996), textile wastewater (Lin and Chen, 1997; Lin and Peng,

1996), industrial wastewater (Lin et al., 1998), and landfill leachate (Lin and Chang, 2000). It was also used to remove phenol (Awad and Abuzaid, 2000) and surfactants (Ciorba et al., 2000) from industrial wastewaters. Although electrochemical coagulation has been utilized for over a century, the available literature reveals little studies on the removal of herbicides by electrochemical coagulation such as Malathion (Pitulice et al., 2013), methyl parathion, atrazine and triazophos (Babu et al., 2011), Malathion, imidacloprid and Chlorpyrifos (Nasser and Nader, 2015a) and abamectin (Nasser and Nader, 2015b). The feedback on these electrodes produces metal hydroxides:

Anode:



hydroxides formed $\text{Fe}(\text{OH})_{n(s)}$ where n is 2 or 3 (equations 2 and 4) remain in the aqueous solution as a gelatinous suspension which can remove pollutants from the waste water (Ibanez et al., 1998; Xinhua et Xiangfeng, 2004). Other hydrated forms of the ion Fe^{3+} , pH dependent, have been suggested (Kobyas et al., 2003):



These complexes act as coagulant. They are adsorbed on the particles, and so cancel the colloidal fillers. The aim of this work is a comparative experimental study on the COD removal in aqueous solutions of the following pesticides, Chlorpyrifos-Ethyl48EC, Fenitrothion 3% and Acetamiprid20% SP by electrocoagulation process using sacrificial anodes Iron.



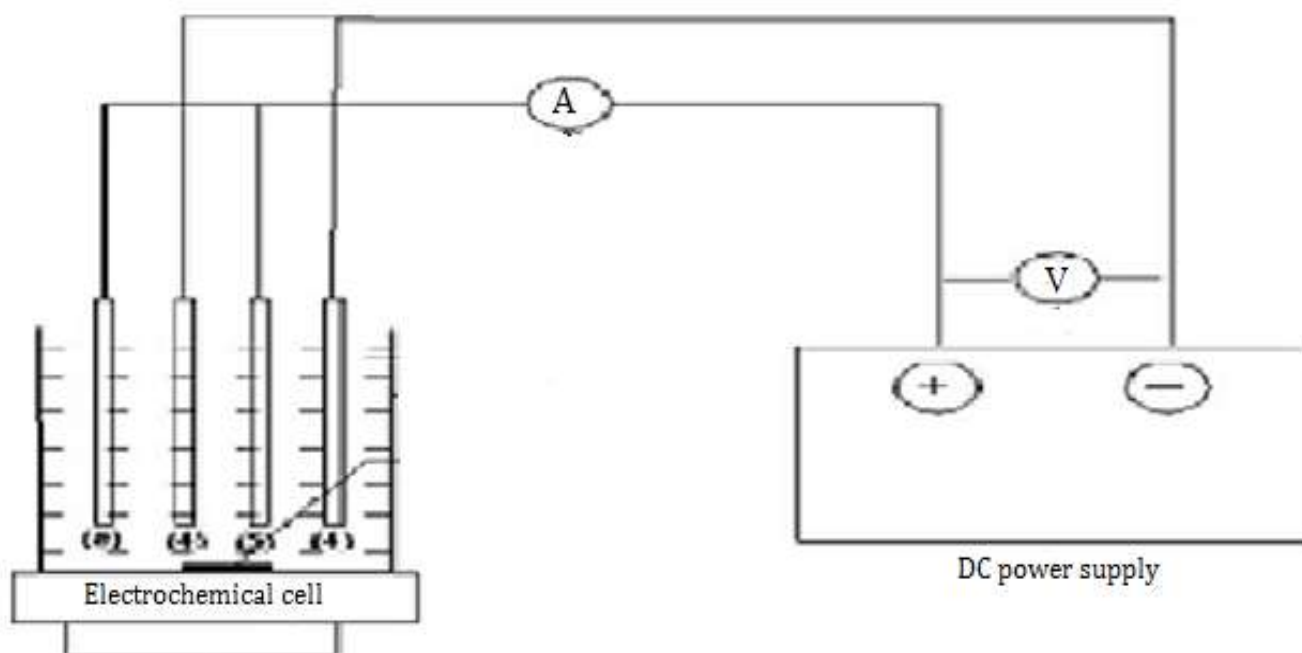


Fig. 1: Electrocoagulation system with Fe electrodes connected in parallel monopolar mode

Cathode:



Fe^{2+} ions are oxidized to Fe^{3+} ions by dissolved oxygen and there is the formation of ferric hydroxide $\text{Fe}(\text{OH})_{3(s)}$ color rust, according to the reaction:



The hydrogen thus generated is therefore involved in the flotation of the flocks and thereby promotes both elimination of suspended solids that the removal of dissolved organic compounds adsorbed partly on the flocks. Iron

MATERIAL AND METHODS

Experimentation

It is preferable to use a monopolar configuration since the consumption of the electrical energy is much higher in a bipolar electrochemical cell for the same imposed current intensity and while maintaining the same spacing between the two electrodes (Yu et al., 2005). The pesticides solutions were prepared with deionized water at 100 mg/L. The electrocoagulation system that was used is shown in Fig. 1.

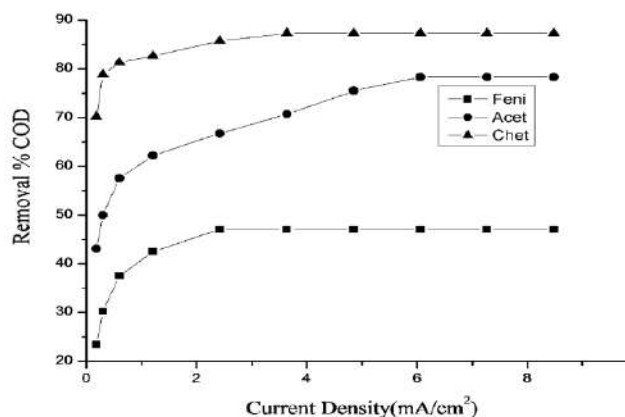


Fig. 2: Efficiencies of COD removal of pesticides as a function of current density: Feni: Temps=5min, pH = 9.72. Acet: Temp = 5 min, pH = 6-7. ChEt: Temp =5min, pH = 6.7

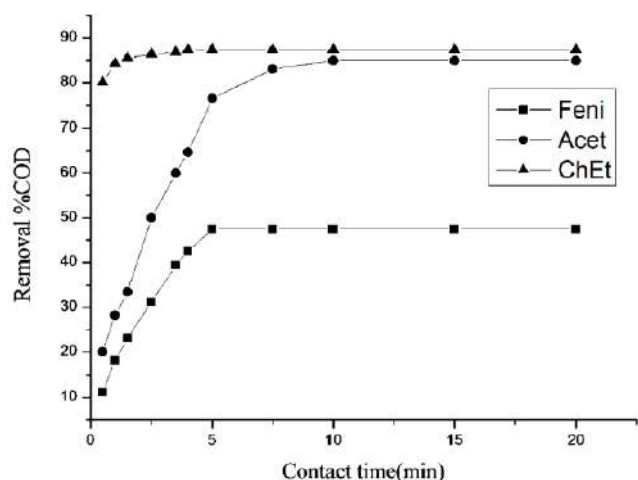


Fig. 3: Efficiencies of COD removal of pesticides as a function operating time: Feni: J (mA/cm²) = 2. 42, pH = 9. 72. Acet: J (mA/cm²) = 6. 1, pH = 6-7. ChEt: J (mA/cm²) = 3.64, pH = 6. 7

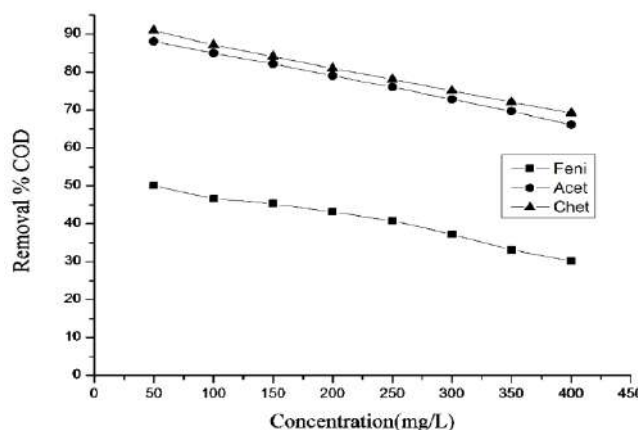


Fig. 4: Efficiencies of COD removal of pesticides as a function initial concentration: Feni: J (mA/cm²)= 2.42, Temp = 5min, pH = 9.72. Acet: J (mA/cm²) = 6.1mA/cm², Temp = 10min, pH = 6-7. ChEt: J (mA/cm²) = 3.64, Temp = 4min, pH = 6.7.

For more precision in reading the current and voltage values, a multimeter and a voltmeter were connected, with a direct current power supply (Leybold Didactic CMBH, Hürth, Germany [30 V and 2.5 A]). The arrangement of a single cell with many electrodes is electrically similar to monopolar electrodes with cells set in parallel (Yousuf et al., 2001). Experiments were carried out in Plexiglas cell with the dimensions (11 cm x 8 cm x 8 cm), equipped with four iron electrodes (99.40%) connected in monopolar parallel mode. Two cathodes and two anodes with the dimensions (10 cm x 5 cm x 0.1cm) and a total active area of 85 cm² were used. The net spacing between two electrodes was 1 cm. A volume of 300 mL of an aqueous pesticides solution was introduced to the cell of electrocoagulation and then stirred at 400 rpm using a magnetic stirrer. The current density was fixed at the desired value at the start of each reaction. All the experiments were conducted at a constant temperature of 25°C. At the end of each electrochemical reaction, the solutions were decanted for 12 hours and then filtered. Before each electrocoagulation, the electrodes were washed with acetone, then immersed in a solution of hydrochloric acid (5%) for 5 minutes, rinsed with distilled water and dried. Conductivities and pH values of solutions were adjusted by 0.3g potassium chloride (KCl) and sulfuric acid H₂SO₄ or sodium hydroxide NaOH solutions 0.1M respectively, the chemicals used above are provided by (Merck, Darmstadt, Germany). The particulates of colloidal ferric oxyhydroxides gave yellow-brown color into the solution after electrocoagulation and electrolytic flotation. The sludge was separated by filtration with filter paper, analyzed by FTIR (Vertex 80, Bruker, France). Then the liquid was analyzed for COD determination, which carried out according to Standard Methods for examination of water (APHA). The COD removal efficiency and the electrical energy consumed in the experiments are:

$$\text{COD Removal (\%)} = \{(\text{COD}_0 - \text{COD}_{\text{final}}) \cdot 100\} / \text{COD}_0 \quad (5)$$

Where, COD (initial) and COD final of the pesticide solutions are calculated in mg/L.

$$E = U \cdot I \cdot t / 3.6 \cdot 10^6 \quad (6)$$

Where, E (kWh), U (Volts), I (Ampere), t (Seconds).

Pesticides

The pesticides are provided by Rivale France. Acetamiprid 20%SP: (E)-N'-[(6-chloro-3-pyridyl) methyl]-N2-cyano-N'-methyl acetamidine. Chlorpyrifos 48EC: O, O-diethyl O-3, 5, 6-trichloropyridin-2-yl phosphorothioate. Féntrothion 3%: O, O-Dimethyl O-(3-methyl-4-nitrophenyl) phosphorothioate).

RESULTS AND DISCUSSION

Effect of current density

It has already been reported by several authors that the applied current density has significant influence on the

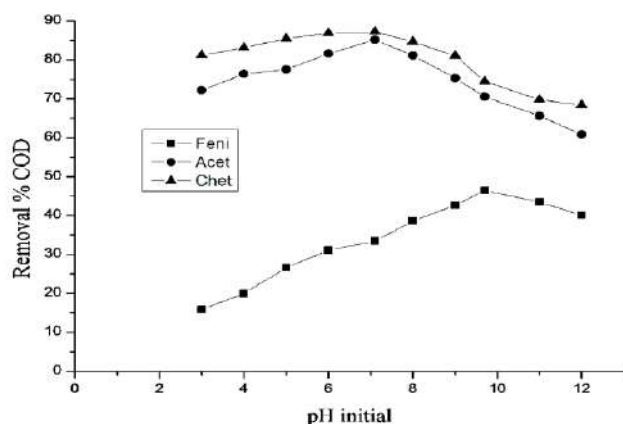


Fig. 5: Efficiencies of COD removal of pesticides as a function initial pH: Feni: J (mA/cm²)= 2.42, Temp = 5 min, Acet: J (mA/cm²) = 6.1, Temp = 10 min. ChEt: J (mA/cm²) = 3.64, Temp = 4min

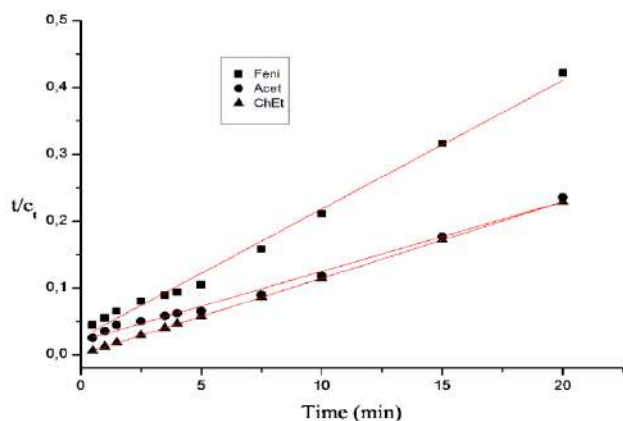


Fig. 6: $t/C_t = f$ (Time) pesticides: Feni, Acet, ChEt

efficiency of the EC process (Mahesh et al., 2006; Holt et al., 2001). The current density determines the coagulant dosage rate. This parameter should have a significant impact on the removal efficiency of the COD. To examine the effect of current density on COD removal efficiency, a series of experiments were carried out with the current density ranging from (0.18 to 8.48 mA/cm²) at a contact time of 5 minutes. Fig. 2 shows the optimum current densities were (2.42, 6.1 and 3.64 mA/cm²) and COD removal efficiencies were (47%, 78% and 87%) for pesticide solutions (Feni, Acet and ChEt), respectively. The increase of coagulant and bubbles generation rate lead to the increase number of H₂ bubbles and decreases their size with increasing current density resulting in a faster removal of COD (Mollah et al., 2004; Holt et al., 2002). Further increase in current density above optimal condition did not lead to an increase in COD removal efficiencies. But the sufficient amount of flocks needed to coagulate the pesticide might be available at optimal current density and further formation of flocks which

did not change COD removal efficiency (Khandegar et Saroha, 2013). The optimal current density of the pesticide (Acet) is higher compared to pesticides (ChEt) and (Feni). This is due to the stronger solubility of (Acet) in water (4.2 g/L) and also to differences in chemical structures. In fact, ChEt and Feni are organophosphorus insecticides with water solubility less than 3 mg/L (Barbash and Resek, 1996). It is noted that the removal efficiency pesticide (Feni) is the lowest; it's partly due to the initial COD concentration which is about double compared to the other two pesticides because the organic matter from pesticides themselves.

Effect of contact time

In the present study, contact time also influenced the treatment efficiency of COD removal. With an increase in contact time, the anodic electrode dissolution led to release of metal ions and the cathode released OH⁻ which formed their hydroxides into pesticides solutions (Benefield et al., 1982; Babu et al., 2007). Fig. 3 depicts that the removal of COD increased progressively with an increase in the contact time from 0.5 to 20 min. with the operating conditions of pesticides solutions, Feni, Acet and ChEt (2.42, 6.1 and 3.64 mA/cm²), the maximum removal of COD (47, 85 and 87%) at optimal contact time (5, 10 and 4 min) respectively. Beyond which there was no significant removal. This may be due to the fact that the dissolved metal ions and their hydroxides in the pesticides solutions achieved the saturation stage for the flock formation. In this process, EC involves two stages which are destabilization and aggregation. The first stage is usually short, whereas the second stage is relatively long (Holt et al., 2005). As shown in Fig. 3 the pesticide (ChEt) was quickly removal, for a time of 1min removal efficiency was 84%. This is probably due to its chemical formula and the size of the molecule.

Effect of the initial concentration

Fig. 4 shows the evolution of COD removal efficiency as a function of the initial pesticides concentration, using the optimum conditions obtained previously for current density, reaction time and pH of solution. In this Figure, pesticides solutions with different concentrations in the range 50–400 mg/L were treated by electrocoagulation process. As expected, the rate of COD removal decreases with the increase in initial pesticide concentration. On the other hand, the percentage COD removal was gradually decreased from 50 to 30% (Feni), 88 to 66 % (Acet) and 91 to 69% (ChEt) as the initial pesticide concentration increased from 50 to 400 mg/L. This is may be attributed to the fact that at a constant current density the same amount of iron ions passes to the solution at different pesticides concentrations. Consequently, the formed amount of iron hydroxide complexes were insufficient to coagulate the greater number of pesticide molecules at higher pesticide concentrations (Daneshvar et al., 2004; Modirshahla et al., 2008). On the other hand, the decrease in removal efficiency with increasing initial pesticide concentration may be attributed to requiring more

coagulant when increasing levels of pollutant. Therefore, it is quite clear that under the present experimental conditions, the lower is the pesticide concentration the better is the COD removal efficiency.

the pH values of the initial pesticides solutions (Table 1). This fact is an advantage and avoids the addition of acid or base to adjust the pH. It was observed that above pH (9.7, 7.1 and 7.1) for pesticides (Feni, Acet and Chet) respectively, there was decreasing trend in adsorption, this may be due to the

Table 1: Initial characteristics of pesticides




Trade name	Asmidion	Aceplan	Alphachlore
Chemical Name	Fenitrothion 3%	Acetamiprid 20%SP	Chlorpyrifos48EC
pH	9.72	6 -7	6.7
COD (mg/L O ₂)	388	125	187
Solubility in Water	<3mg/L	4.2g/L	<3mg/L
Appearance	Green Powder	Blue Powder	Orange-Honey Liquid
Brute formula	C ₉ H ₁₂ NO ₅ PS	C ₁₀ -H ₁₁ -ClN ₄	C ₉ H ₁₁ Cl ₃ NO ₃ PS
molar mass(g)	277	223	350
Formula			

Table 2: Pseudo-kinetic rate constants with second-order models for COD removal of pesticides

Pesticides	t/C _t	k ₂	R ²
Fenitrothion	0.02575 + 0.01924.t	0.01728	0.993
Acetamiprid	0.02061 + 0.01041.t	0.00673	0.992
Chlorpyrifos	0.00032 + 0.01143.t	0.40956	0.999

Table 3: Estimated EC process at optimum conditions

Pesticides	Fénitrothion3%	Chlorpyrifos	Acetamiprid
E (KWh/ Kg of COD Removal)	0.273	0.552	5.503
Cost(\$)	0.012 \$	0.025 \$	0.25 \$

Effect of initial pH

The pH is an important operating factor influencing the performance of the electrocoagulation process Chen et al. (2000). A series of experiments were carried out to evaluate effect of initial pH using solutions containing a sample with an initial pH varying in the range (3-12) at current density of (2.42, 6.1 and 3.64 mA/cm²) and at times (5, 10 and 4 min), for pesticide solutions (Feni, Acet and Chet) respectively. Fig. 5 display that the removal efficiencies of COD were low in acidic medium, meanwhile, in neutral and alkaline medium the removal efficiencies were much higher using all working electrodes due to the formation of metal hydroxide species which adsorb the pesticides molecules and causes the increase of the removal efficiency (Daneshvar et al., 2004). Fig. 5 shows that the maximum COD removal (47, 85 and 87%) was at pH (9.7, 7.1 and 7.1) for pesticides (Feni, Acet and ChEt) respectively. We observe that the optimal pH was

oxidation of ferrous iron Fe(II) to ferric iron Fe(III) diminishes, resulting decreased removal efficiency in acidic pH values. Neutral and slightly alkaline pH, however, tends to favor Fe(II) to Fe(III) oxidation as well as complex polymerization. Finally, hydroxylated colloidal polymers and an insoluble precipitate of hydrated ferric oxide were formed and the removal efficiency was increased. The decrease of removal efficiency when the pH is higher than 10, and more acidic was observed by many investigators (Vasudevan et Lakshmi, 2012) and was attributed to an amphoteric behavior of M(OH)₃ which leads to soluble metal cations (at acidic pH) and to monomeric anions (at alkaline pH). We note that the optimal pH values proved conveying the removal efficiencies are due to the presence of metal hydroxides zone are consistent with the following reference (Pourbaix, 1974).

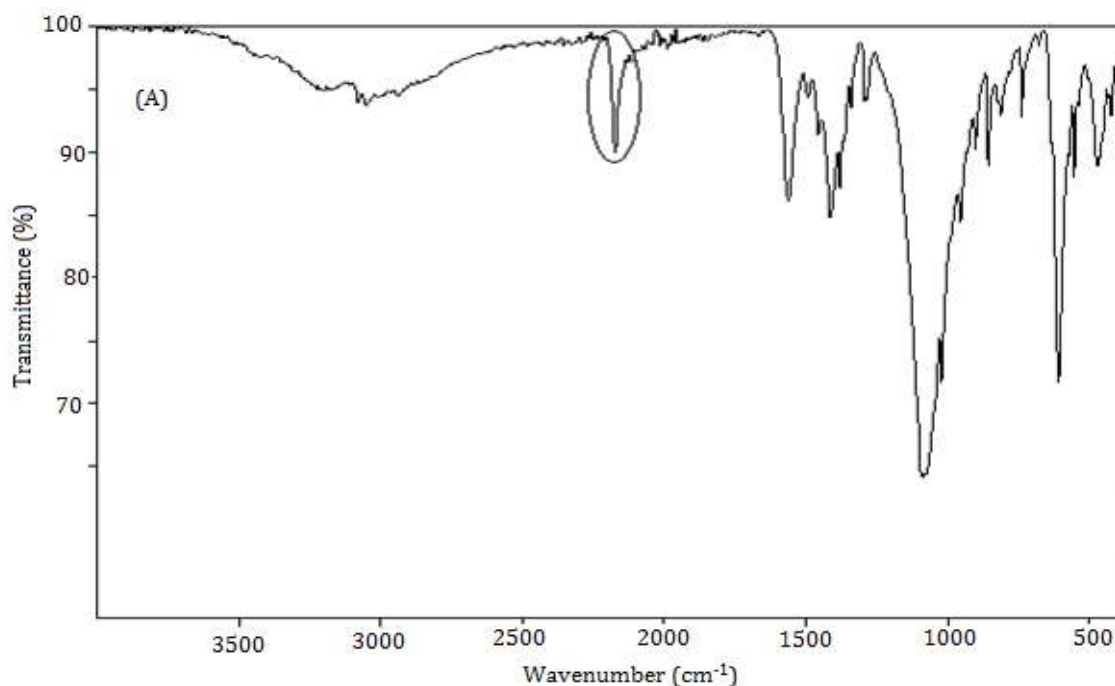


Fig. 7a: FT-IR spectrum of initial pesticide acetamiprid

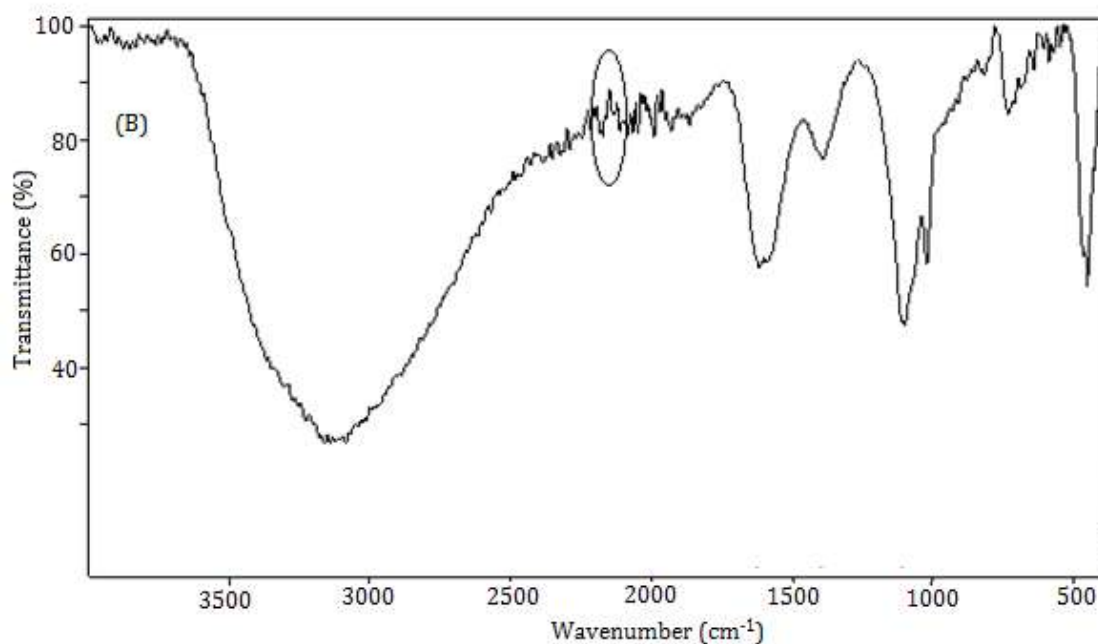


Fig. 7b: FT-IR spectra of Sludge Acetamiprid after EC

Kinetic studies of the pesticides removal

The removal rate of pesticides can be represented by the following linear- pseudo - second - order equation:

$$t/C_t = 1/k_2 C_e^2 + t/C_e \quad (7)$$

C_t : the removal rate % of the COD at t time. C_e : maximum removal rate % of the COD. k_2 (min^{-1}): the reaction rate coefficient, t : contact time (min).

As it can be seen in Fig. 6, a pseudo-second-order kinetic model provided a good fit to the experimental results for COD removal of pesticides. It can be ascertained that a

higher value of regression coefficient of R^2 (~ 0.99) for the pseudo- second order kinetics confirms that the EC process of COD removal. The values of k_2 obtained from the slope are shown in Table 2.

FTIR spectral studies

After the experiment at the optimum conditions, the sludge is recovered above the reactor by filtration, was dried to 105 °C and analyzed by IR. Compared with the IR spectrum of the initial pesticide as shown in Fig. 7b: Pesticide Acetamidrid: Enlargement of the bands, e.g. only one Peak due to stretching absorption of aromatic $=C-H$ at 3086cm^{-1} instead of two, one Peak for aromatic $C=C$ at 1616cm^{-1} . This is likely due to intermolecular bonds. No Peak due to stretching absorption of $-C\equiv N$ to 2173cm^{-1} , this is probably due to a combination inductive effect or effect (-I) chlorine. For the other two pesticides, there is no remarkable difference between the initial pesticide and the sludge. The energy cost (kWh/ Kg for removal of COD) was calculated by applying the equation (6) and results are shown in Table 3.

CONCLUSIONS

The electrocoagulation is a quick and efficient process. Effect of various parameters such as operating time, current density and pH was evaluated. It was found that 47% (Feni), 85% (Acet) and 87% (Chet) removal in COD was achieved within (5, 10 and 4min) of EC treatment for the pesticides. Further increase in treatment time did not improve their removal efficiency. Change in pH value during EC treatment was also noted and maximum value of 9.7(Feni) and 7.1(Acet and Chet) was observed at the end of treatment which is within allowable limits. Applied current density has significant effect on the removal efficiency of EC process. It was found that the current density of (2.42, 6.1 and 3.64 mA/cm²) has the highest removal efficiency for studied pesticides (Feni, Acet and Chet) respectively. Further increase in current density showed insignificant improvement in removal efficiency. It has been found that the pesticide (Chet) was quickly removal and the most and the pesticide (Feni) has a low maximum rate, it's in initial concentration of COD is on about double the other two pesticides. Since the Acet pesticide has its current density and optimal contact time greater than the other two, the cost of electricity consumption is greater (0.25\$ / Kg of COD removal). This strongly suggests that the pesticides removal rate is most appropriately represented by a pseudo - second - order process. Finally, according to findings of this study it can be concluded that electrocoagulation process can effectively remove pesticides from aqueous solutions and cost no expensive.

ACKNOWLEDGEMENTS

The authors wish to acknowledge Ms Nordine Narimane, Head of the Measurement Center, for helping us with this work.

REFERENCES

- American Public Health Association, American Water Works Association and Water Pollution Control examination of water and wastewater (16th Edition), Washington, D.C.American Public Health Association, American Water Works Association, Water Pollution Control Federation.
- Awad, Y.M., Abuzaid, N.S., 2000. The influence of residence time on the anodic oxidation of phenol. Separation Purification Technologie 18, 227-236.
- Babu, B. R., Meera, K. M., Venkatesan, P., 2011. Removal of pesticides from wastewater by electrochemical methods a comparative approach. Sustainable Environmental Research 21, 401-406.
- Babu, R. R., Bhadrinarayana, N.S., Meera, K.M., Begum, S., Anantharaman, N., 2007. Treatment of tannery wastewater by Electrocoagulation. University of ChemicalTechnology and Metallurgy 42, 201-206.
- Barbash, J. E., Resek, E.A., 1996. Pesticides in Ground Water: Distribution, Trends, and Governing Factors, Volume 2 in the series Pesticides in the Hydrologic System, U.S. Geological Survey, Ann Arbor Press (Chelsea, MI).
- Benefield, L.D., Judkins, J.F., Weand, B.L., 1982. Process Chemistry for Water and Wastewater Treatment. Prentice-Hall Inc, Publisher, Englewood Cliffs, NJ, 07632
- Chen, X., Chen, G., Yue, P.L., 2000. Separation of pollutants from restaurant wastewater by electrocoagulation. Separation Purification Technology 19, 65-76
- Ciorba, G.A., Radovan, C., Vlaicu, I., Pitulice, L., 2000. Correlation between organic Component and electrode material: consequences on removal of surfactants from Wastewater. Electrochemistry Acta 46, 297-303.
- Daneshvar, N., Ashassi, S.H., Kasiri, M.B., 2004. Decolorization of dye solution containing Acid Red 14 by electrocoagulation with a comparative investigation of different electrode connections. Hazardous Materials 112, 55-62.
- Holt, P.K., Barton, G.W., Mitchell, C.A., 2001. The Role of Current in Determining Pollutant Removal in Batch Electrocoagulation. 6th World Congress of Chemical Engineering, CD ROM (Paper 518), Melbourne. P. 23-27.
- Holt, P.K., Barton, G., Wark, M., Mitchell, C., 2002. A quantitative comparison between chemical dosing and Electrocoagulation. Colloids and Surfaces A: Physicochemical and Engineering Aspects 211, 233-248.
- Holt, P.K., Barton, G.W., Mitchell, C.A., 2005. The future of electrocoagulation as a localized water treatment tech. Chemosphere 59, 355-367.
- Ibanez, J.G., Singh, M.H., Szafr, Z., 1998. Laboratory experiments on electrochemical remediation of the

- environment. Part 4: color removal of simulated wastewater by electrocoagulation- electroflotation. *Chemistry Education* 75, 1040-1041.
- Khandegar, V., Saroha, A. K., 2013. Electrocoagulation for the treatment of textile industry Effluent-A review. *Environmental Management* 128, 949-963.
- Koby, M., Can, O.T., Bayramoglu, M., 2003. Treatment of textile wastewaters by electrocoagulation using iron and aluminum electrodes. *Hazardous Materials* 100, 163-178.
- Lin, S.H., Wu, C.L., 1996. Electrochemical removal of nitrite and ammonia for aquaculture. *Water Research* 30, 715-722.
- Lin, S.H., Peng, C.F., 1996. Continuous treatment of textile wastewater by combined coagulation. *Water Research* 30, 587-592.
- Lin, S.H., Chen, M.L., 1997. Treatment of textile wastewater by chemical methods for reuse. *Water Research* 31, 868-876.
- Lin, S.H., Shyu, C.T., Sun, M.C., 1998. Saline wastewater treatment by electrochemical Method. *Water Research* 32, 1059-1067.
- Lin, S.H., Chang, C.C., 2000. Treatment of landfill leachate by combined electro-Fenton Oxidation and sequencing batch reactor method. *Water Research* 34, 4243-4249.
- Mahesh, S., Prasad, B., Mall, I.D., Mishra, I.M., 2006. Electrochemical degradation of pulp and paper mill waste water. Part 1. COD and color removal. *Industrial and Engineering chemistry Research* 45, 2830-2839.
- Mameri, N., Yeddou, A.R., Lounici, H., Belhocine, D., Grib, H., Bariou, B., 1998. defluoridation of septentrional Sahara water of North Africa by Electrocoagulation process using bipolar aluminum electrode. *Water Research* 32, 1604-1612.
- Modirshahla, N., Behnajady, M.A., Mohammadi-Aghdam, S., 2008. Investigation of the effect of different electrodes and their connections on the removal efficiency of 4-nitrophenol from aqueous solution by electrocoagulation. *Hazardous Materials* 154, 778-786.
- Mollah, M.Y.A., Morkovsky, P., Gomes, J.A.G., Kesmez, M., Parga, J., Cocke, D.L., 2004. fundamentals, present and future perspectives of Electrocoagulation. *Hazardous Materials* 114, 199-210.
- Nasser, M. G., Nader, B. F., 2015a. Removal of Imidacloprid Pesticide by electrocoagulation process using Iron and aluminum Electrodes. *Environmental Analytical Chemistry* 4, 2380-2391.
- Nasser, M. G., Nader, B. F., 2015b. Removal of Abamectin Pesticide by Electrocoagulation process Using Stainless Steel and Iron Electrodes. *Environnemental Analytical Chemistry* 3, 1-7.
- Pitulice, M., Grib, H., Drouiche, N., Abdi, N., Lounici, H., Mameri, N., 2013. Removal of Malathion Pesticide from Polluted Solutions by Electrocoagulation: Modeling of Experimental Results using Response Surface Methodology. *Separation Science and Technology* 48, 664-672.
- Pourbaix, M., 1974. Atlas of electrochemical equilibrium in aqueous solutions (2e Edition). Pergamon Press, Houston
- Rajeshwar, K., Ibanez, J. G., Swai, G. M., 1994. Electrochemistry and the environment. *Applied Electrochemistry* 24, 1077-1091.
- Xinhua, X., Xiangfeng, Z., 2004. Treatment of refractory oily wastewater by electro-coagulation process. *Chemosphere* 56, 889-894.
- Younes, M., Galal-Gorchev, H., 2000. Pesticides in Drinking Water-A Case Study. *Food Chemical Toxicology* 38, 87-90.
- Yousuf, M., Mollah, A., Schennach, R., Parga, J. R., Cocke, D. L., 2001. Electrocoagulation (EC)—Sciences and Applications. *Hazardous Materials* 84, 29-41.
- Yu, M.J., Koo, J.S., Myung, G.N., Cho, Y.K., Cho, Y.M., 2005. Evaluation of bipolar Electrocoagulation applied to biofiltration for phosphorus removal. *Water Science Technology* 51 (10), 231-239.
- Vasudevan, S., Lakshmi, J., 2012. Effect of alternating and direct current in an Electrocoagulation process on the removal of cadmium from water. *Water Science and Technology* 65, 353-360.
- Vik, E.L., Carlson, D.A., Ekum, A.S., Gjessing, E.T., 1984. Electrocoagulation of potable water. *Water Research* 18, 1355-1360.
- Vlyssides, A. G., Karlis, P. K., Zorpas, A. A., 1999. Electrochemical oxidation of no cyanide Strippers wastes. *Environmental International* 25, 663-670.

Visit us at: <http://bosajournals.com/chemint/>
Submissions are accepted at: editorci@bosajournals.com